


KDT KE-706 Edgebander-

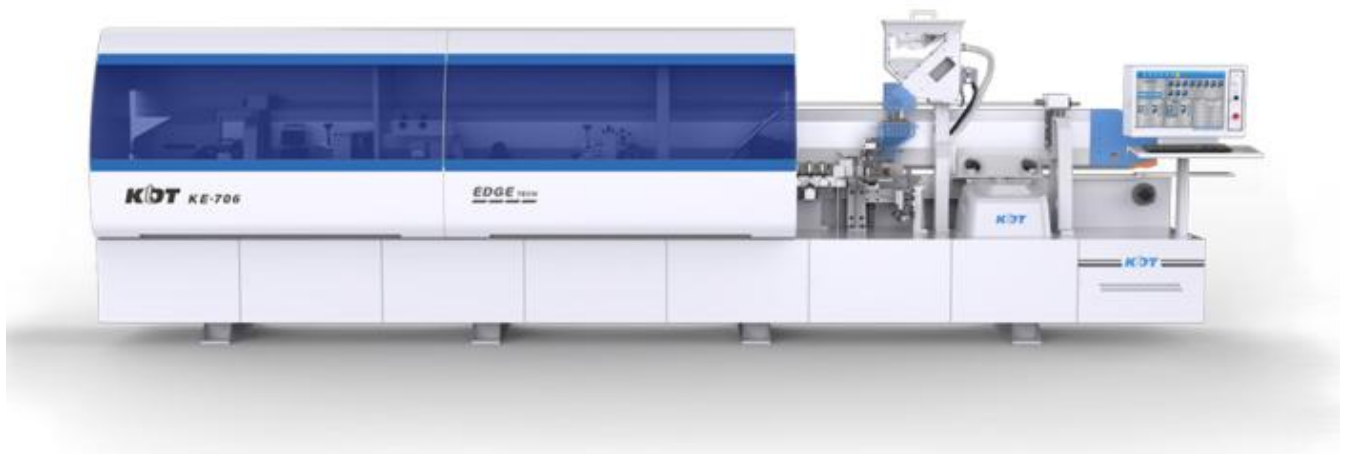

The KE-706 Edgebander is an affordable industrial-level fully loaded, auto-adjustable Edgebander, with 6 independent servo motors for quick and precise adjustments from the control panel to an accuracy of 0.01mm.

Auckland
19 Allens Road, East Tamaki
Auckland 2013
Ph (09) 271 7700
Fax (09) 271 7728

Christchurch
159 Ferry Road, Waltham
Christchurch 8011
Ph (03) 366 2013
Fax (03) 366 2021

Call free: 0800 522 577
Copyright © 2025 W & R Jack Limited.



KDT KE-706 Edgebander-



Overview and features

- Anti-adhesive spray unit prior to Pre-milling
- Top Pressure Beam - Servo Adjustable
- Solid Polished Steel Infeed Fence - Servo Adjustable
- Pre-Milling Unit with Diamond Tooling
- Gravity Fed Quick-Change EVA Hot-Melt Glue Application Unit
- Pressure Zone - Servo Adjustable
- End Trimming Unit
- Fine Trim Trimming Unit - Servo Adjustable
- 2 Motor Corner Rounding Unit - 2-Point Pneumatic Adjustment
- Multi-Profile Top & Bottom Radius Scraping Unit - Servo Adjustable
- Flat Surface Scraping Unit
- Detergent Spray Unit
- Buffing Unit

Specifications

Weight	2500kg
Feed speed	15 & 18m/min
Tape thickness	0.4 - 3mm
Panel thickness	9 - 60mm
Dimensions (W x D x H)	940 x 5900 x 1960mm

Specifications are subject to change without notice.

